

80 watt photovoltaic module

BP 380

High-efficiency photovoltaic module using silicon nitride multicrystalline silicon cells

Performance	BP 380	BP 375
Rated power (P _{max})	80W	75W
Module efficiency	± 3%	± 3%
Nominal voltage	12V	12V
Warranty ¹	25years	



Configuration

S/N BP 380S/N	Clear universal frame with LoPro J-box and polarised multicontact (MC) connectors
J BP 380J	Clear universal frame and standard J-box

Qualification test parameters

Temperature cycling range	-40°C to +85°C (-40°F to 185°F)
Damp heat test	85°C ,85% relative humidity
Front and rear static load test (eg: wind)	2,400 Pa (50psf)
Front load test (eg: snow)	5,400 Pa (113psf)
Hailstone impact test	25mm Ø (1 inch) at 23m/s (52mph)

Typical electrical characteristics ²	BP380	BP375
Rated power (P _{max}) ³	80W	75W
Voltage at P _{max} (V _{mp})	17.6V	17.3V
Current at P _{max} (I _{mp})	4.5A	4.3A
Short circuit current (I _{sc})	4.8A	4.7A
Open circuit voltage (V _{oc})	22.1V	21.8V
Temperature coefficient of I _s	(0.065±0.015)%/ °C	
Temperature coefficient of V _{oc}	-(80±10)mV/°C	
Temperature coefficient of P _{max}	-(0.5±0.05)%/ °C	
NOCT	47±2°C (Air 20°C; Sun 0.8kW/m ² ; wind 1m/s)	
Maximum series fuse rating	15A (S); 20A (J)	
Maximum system voltage	600V (US NEC rating) 1000V (TÜV Rheinland rating) 1000V (IEC 61215 rating)	

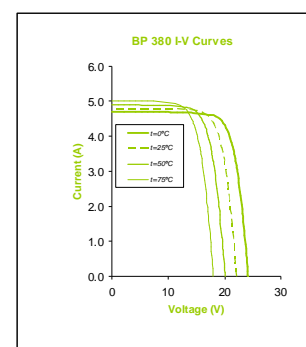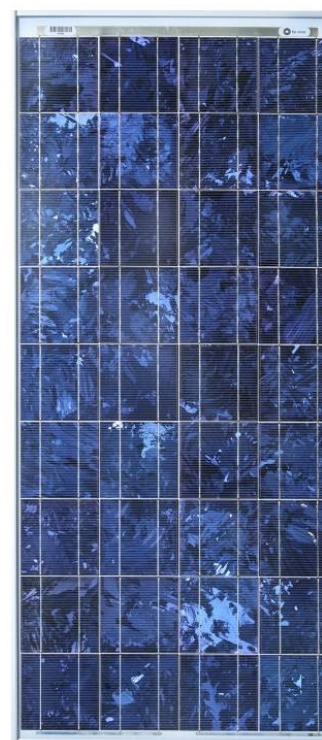


80 watt photovoltaic module

BP 380

Module diagram

Dimensions in brackets are in inches. Un-bracketed dimensions are in millimetres. Overall tolerances $\pm 3\text{mm}$ (1/8")

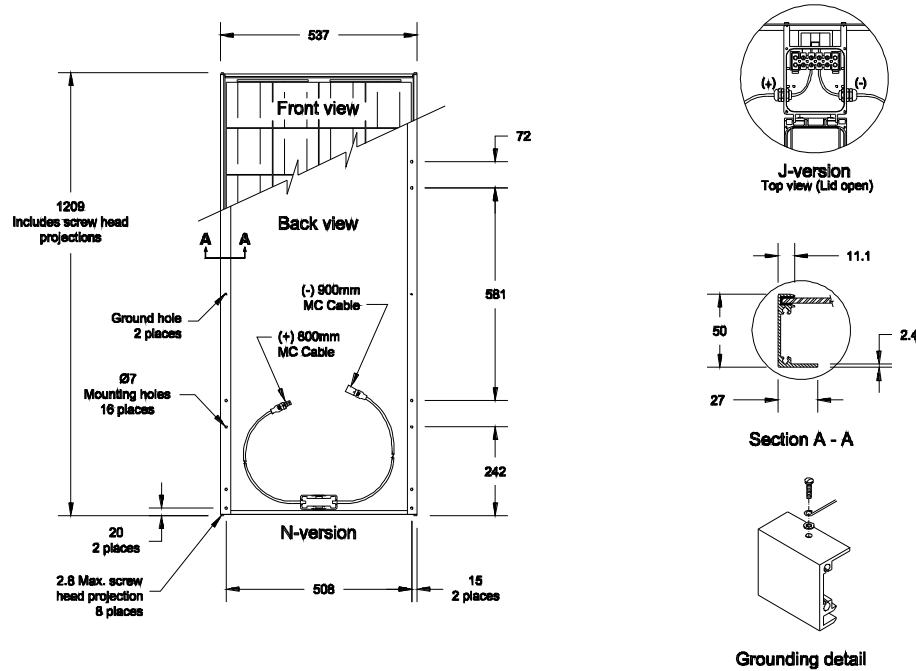

Mechanical characteristics: BP380

Dimensions	S,N,J,	Length: 1209mm (47.6inch) Width: 537mm (21.14inch) Depth: 50mm (1.97inch)
Weight	S,N,J,	7.7 kg (17.0pound)
Solar cells	S,N,J	36 cells (125mm x 125mm) in a 4 x 9 matrix connected in series
Output cables	S,N	RHW AWG# 12 (4mm ²) cable with polarized weatherproof DC rated Multicontact connectors; asymmetrical lengths - 900mm (-) and 800mm (+)
Junction box	J	J-Version junction box with 6-terminal connection block; IP 65, accepts PG 13.5, M20, ½ inch conduit, or cable fittings accepting 6 - 12mm diameter cable. Terminals accept 2.5 to 10mm ² (8 to 14 AWG) wire.
Diodes	S,N,J	IntegraBus™ technology includes Schottky bypass diodes integrated into the printed circuit board bus.
Construction	S,N,J	Front: high transmission 3mm (1/8 inch) tempered glass. Back: polyester Encapsulant: EVA
Frame	S,N,J	Clear anodised aluminium alloy type 6063T6 Universal frame; Colour: silver

1 Module Warranty: 25-year limited warranty of 80% power output; 12-year limited warranty of 90% power output; 5-year limited warranty of materials and workmanship. See your local representative for full terms of these warranties

2. These data represent the performance of typical BP380 products, and are based on measurements made in accordance with ASTM E1036 corrected to SRC (STC.)

3. During the stabilisation process that occurs during the first few months of deployment, module power may decrease by up to 3% from typical Pmax. www.bpsunoasis.com